

Specifications

Port Sizes	3", 4", 6" RFSO
Connection	Raised face 150# Flange
Flow Capacity	1900/3000 SCFM @ 100 PSI
Filter Capacity	0.01 micron & larger
Differential Pressure	< 1.5 PSID at rated flow
Max. Temp./Pressure (Epoxy Coated Carbon Steel)	150 °F/200 PSIG
Approx. Weight (lb.)	280.0/290.0/420.0
ISO Class	1 Particulate/Oil

For higher pressure applications, consult factory. Units equipped with external auto drain have max. temperature and pressure of 150 °F and 150 PSIG.




Water
Dirt
Oil
Oil Vapor
Odor

Replacement Parts & Accessories

Description	Part Number
A Replacement Element	3C-1900/3C-3000
B Differential Pressure Indicator	N32-P2-DPi
C Manual Brass Petcock Drain, Ball Valve	BV-051
D External Automatic Float Drain	N32-95-XD8

Note:
All 3C-1900 units require a minimum of 25" clearance between bottom of housing and floor for installation.
All 3C-3000 units require a minimum of 36" clearance between bottom of housing and floor for installation.

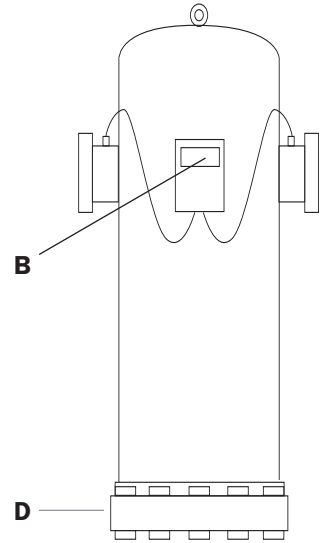

Order Guide

	Port Size	Model Number	Dimensions (in.)		
			Height	Width	Depth
Manual Drain	3"	3C-1900-MFD-P	50.2	20.0	16.0
	4"	3C-1900-MFE-P	50.2	20.0	16.0
	6"	3C-3000-MFF-P	50.2	23.4	19.0
External Automatic Drain	3"	3C-1900-MFD-X	50.2	20.0	16.0
	4"	3C-1900-MFE-X	50.2	20.0	16.0
	6"	3C-3000-MFF-X	50.2	23.4	19.0

Indicator included as standard with these metal bowl units.

