

# Specifications

<b>Port Sizes</b>	3", 4", 6" RFSO
<b>Connection</b>	Raised face 150# Flange
<b>Flow Capacity</b>	1900/3000 SCFM @ 100 PSI
<b>Filter Capacity</b>	0.01 micron & larger
<b>Differential Pressure</b>	< 2.5 PSID at rated flow
<b>Max. Temp./Pressure</b> (Epoxy Coated Carbon Steel)	150 °F/200 PSIG
<b>Approx. Weight (lb.)</b>	600.0/620.0/900.0
<b>ISO Class</b>	1 Particulate/Oil

For higher pressure applications, consult factory. Units equipped with external auto drain have max. temperature and pressure of 150 °F and 150 PSIG.




**Water**  
**Dirt**  
**Oil**  
**Oil Vapor**  
**Odor**

# Replacement Parts & Accessories

Description	Part Number
<b>A</b> Replacement Element, 1st Stage	1X-2500/1X-5500
<b>B</b> Replacement Element, 2nd Stage	3C-1900/3C-3000
<b>C</b> Differential Pressure Indicator	N32-P2-DPi
<b>D</b> Manual Petcock Drain, Ball Valve	BV-051
<b>E</b> External Automatic Float Drain	N32-95-XD8

Note:  
All 1900 units require a minimum of 25" clearance between bottom of housing and floor for installation.  
All 3000 units require a minimum of 36" clearance between bottom of housing and floor for installation.

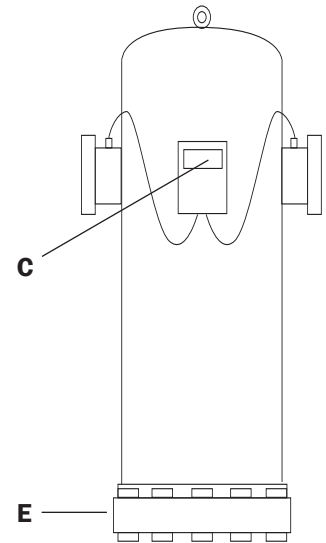

# Order Guide

	Port Size	Model Number	Dimensions (in.)		
			Height	Width	Depth
<b>Manual Drain</b>	3"	1M-1900-MFD-DCP	50.2	40.1	16.0
	4"	1M-1900-MFE-DCP	50.2	40.1	16.0
	6"	1M-3000-MFF-DCP	68.0	46.9	19.0
<b>External Automatic Drain</b>	3"	1M-1900-MFD-DCX	54.2	40.1	16.0
	4"	1M-1900-MFE-DCX	54.2	40.1	16.0
	6"	1M-3000-MFF-DCX	72.0	46.9	19.0

Indicator included as standard with metal bowl units.

