

Specifications

Port Sizes	3", 4", 6" RFSO
Connection	Raised face 150# Flange
Flow Capacity	2500/5500 SCFM @ 100 PSI
Filter Capacity	3.0 micron & larger
Differential Pressure	< 1.5 PSID at rated flow
Max. Temp./Pressure (Epoxy Coated Carbon Steel)	150 °F/200 PSIG
Approx. Weight (lb.)	300.0/310.0/450.0
ISO Class	3 Particulate

For higher pressure applications, consult factory. Units equipped with an external auto drain have max. temperature and pressure of 150 °F and 150 PSIG.




Water
Dirt
Oil
Oil Vapor
Odor

Replacement Parts & Accessories

Description	Part Number
A Differential Pressure Indicator	N32-P2-DPI
B External Automatic Float Drain	N32-95-XD8
Manual Petcock Drain, Ball Valve	BV-051
Replacement Element	1X-2500/1X-5500

Note:
All 1M-2500 units require a minimum of 25" clearance between bottom of housing and floor for installation.
All 1M-5500 units require a minimum of 36" clearance between bottom of housing and floor for installation.

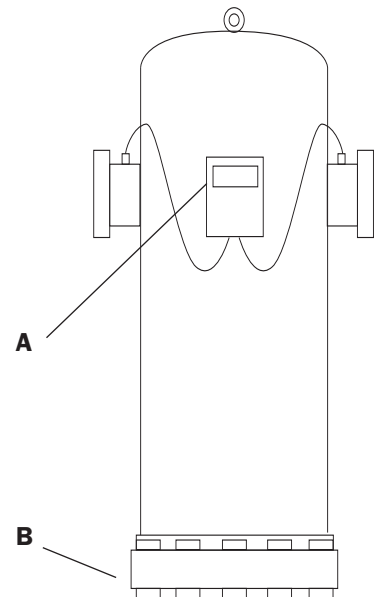

Order Guide

	Port Size	Model Number (ASME Vessel)	Dimensions (in.)		
			Height	Width	Depth
Manual Drain	3"	1M-2500-MFD-P	50.2	20.0	16.0
	4"	1M-2500-MFE-P	50.2	20.0	16.0
	6"	1M-5500-MFF-P	68.0	23.4	19.0
External Automatic Drain	3"	1M-2500-MFD-X	54.2	20.0	16.0
	4"	1M-2500-MFE-X	54.2	20.0	16.0
	6"	1M-5500-MFF-X	72.0	23.4	19.0

Indicator is included as standard with these powder coated steel units.