




Specifications

Port Sizes	1¼", 1½", 2"
Thread Styles	NPT, BSPT, BSPP
Flow Capacity	300/400/700 SCFM @ 100 PSI
Filter Capacity	3.0 micron & larger
Differential Pressure	< 1.5 PSID at rated flow
Max. Temp./Pressure (Aluminum Bowl)	175 ° F/200 PSIG
Approx. Weight (lb.)	30.0
ISO Class	3 Particulate

For higher pressure applications, consult factory. Units equipped with differential pressure indicator have max. temperature and pressure of 125 ° F and 150 PSIG, regardless of bowl material.



Water
Dirt
Oil
Oil Vapor
Odor

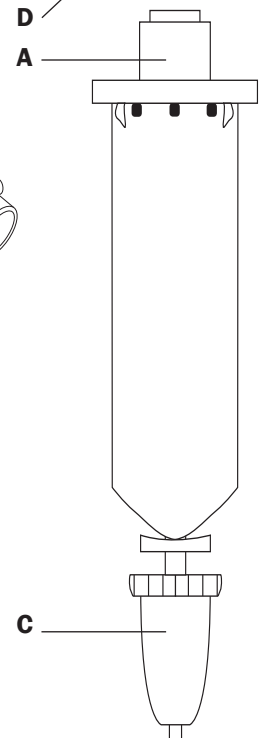

Replacement Parts & Accessories

Description	Part Number
A Replacement Element	1M-300/1M-400/1M-700
B Manual Petcock Drain, Ball Valve	BV-051
C External Automatic Float Drain	N32-95-XD8
D Bowl O-ring	N32-F35-OR
E Differential Pressure Indicator (Optional)	N32-W1-DPi

Order Guide

	Port Size	Model Number		
		Low Flow	Med Flow	High Flow
Manual Drain	1¼"	1M-300-M10-P	1M-400-M10-P	1M-700-M10-P
	1½"	1M-300-M12-P	1M-400-M12-P	1M-700-M12-P
	2"	1M-300-M16-P	1M-400-M16-P	1M-700-M16-P

Dimensions (in.)		
Height*	Width	Depth
29.4	7.8	7.8
29.4	7.8	7.8
29.4	7.8	7.8

External Automatic Drain	1¼"	1M-300-M10-F	1M-400-M10-F	1M-700-M10-F
	1½"	1M-300-M12-F	1M-400-M12-F	1M-700-M12-F
	2"	1M-300-M16-F	1M-400-M16-F	1M-700-M16-F

32.0	7.8	7.8
32.0	7.8	7.8
32.0	7.8	7.8

*To add an indicator, add "i" to end of model number (Indicator adds about 1" to height)

