

Specifications

Port Sizes	½", 1"
Thread Styles	NPT, BSPT, BSPP
Flow Capacity	60/90/150/250 SCFM @ 100 PSI
Filter Capacity	0.01 micron & larger
Differential Pressure	< 3.0 PSID at rated flow
Max. Temp./Pressure (Manual Drain)	150 °F/250 PSIG
Max. Temp./Pressure (Auto Float Drain)	125 °F/150 PSIG
Approx. Weight (lb.)	7.0/10.0/10.0/10.0
ISO Class	1 Particulate/Oil

For higher pressure stainless steel applications, please consult factory.




NACE Compliant

Water
Dirt
Oil
Oil Vapor
Odor

Replacement Parts & Accessories

Description	Part Number
A Replacement Element	3C-060/3C-090/3C-150/3C-250
B Manual Petcock Drain	SV1-3/8
C Automatic Float Drain	N32-95-973-FG
D Bowl O-ring (60)	KSG-171
D Bowl O-ring (90/150/250)	KSG-176
Mounting Bracket (Optional)	BK-1

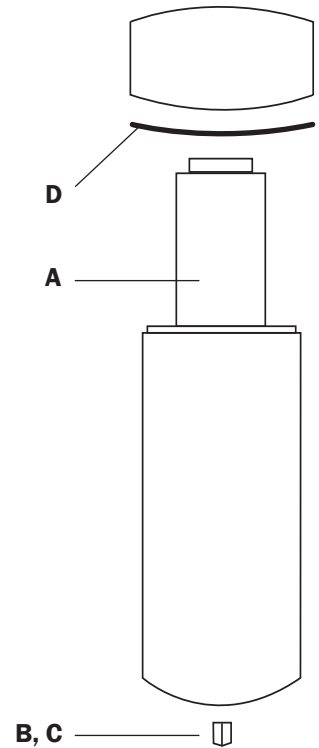

Order Guide

	Port Size	Model Number	Dimensions (in.)		
			Height	Width	Depth
Manual Drain	½"	3C-060-S04-P	12.0	3.0	3.3
	1"	3C-090-S08-P	16.6	3.8	4.0
	1"	3C-150-S08-P	16.6	3.8	4.0
	1"	3C-250-S08-P	16.6	3.8	4.0
Automatic Drain	½"	3C-060-S04-F	11.0	3.0	3.3
	1"	3C-090-S08-F	15.6	3.8	4.0
	1"	3C-150-S08-F	15.6	3.8	4.0
	1"	3C-250-S08-F	15.6	3.8	4.0

