

Specifications

Port Sizes	½", 1"
Thread Styles	NPT
Flow Capacity	60/90/150 SCFM @ 100 PSI
Filter Capacity	0.01 micron & larger
Differential Pressure	< 3.0 PSID at rated flow
Max. Temp./Pressure	150 °F/250 PSIG
Approx. Weight (lb.)	14.0/20.0/20.0
ISO Class	1 Particulate/Oil




Water
Dirt
Oil
Oil Vapor
Odor

For higher pressure stainless steel applications, please consult factory.

NACE Compliant

Replacement Parts & Accessories

Description	Part Number
A Replacement Element, 1st Stage	3P-060/3P-090/3P-150
B Replacement Element, 2nd Stage	3C-060/3C-090/3C-150
C Manual Drain	SV1-3/8
D Automatic Float Drain	N32-95-973-FG
E Bowl O-ring (60)	KSG-171
E Bowl O-ring (90/150)	KSG-176
Mounting Bracket (Optional)	BK-1

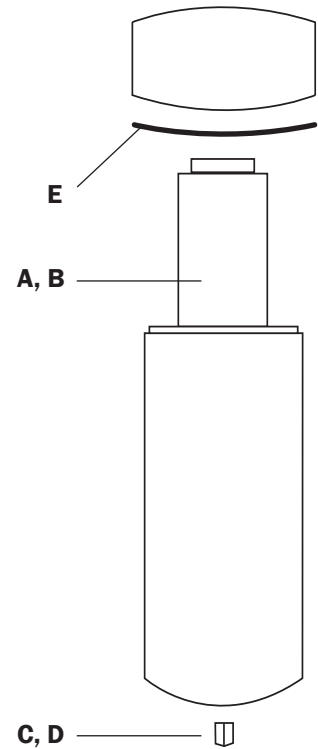

Order Guide

	Port Size	Model Number	Dimensions (in.)		
			Height	Width	Depth
Manual Drain	½"	3P-060-S04-DCP	12.0	6.4	3.3
	1"	3P-090-S08-DCP	16.6	7.8	4.0
	1"	3P-150-S08-DCP	16.6	7.8	4.0
Automatic Drain	½"	3P-060-S04-DC	11.0	6.4	3.3
	1"	3P-090-S08-DC	15.6	7.8	4.0
	1"	3P-150-S08-DC	15.6	7.8	4.0

