

# Specifications


<b>Port Sizes</b>	¾", 1"
<b>Thread Styles</b>	NPT, BSPT, BSPP
<b>Flow Capacity</b>	25 SCFM @ 100 PSI
<b>Filter Capacity</b>	1.0 micron & larger Activated Carbon Oil Adsorption to 0.003 PPM
<b>Differential Pressure</b>	< 5.0 PSID at rated flow
<b>Max. Temp./Pressure (Aluminum Bowl)</b>	125 °F/150 PSIG
<b>Approx. Weight (lb.)</b>	25.0
<b>ISO Class</b>	1 Particulate/Oil & 2 Pressure Dew Point



**Water**  
**Dirt**  
**Oil**  
**Oil Vapor**  
**Water Vapor**  
**Odor**

# Replacement Parts & Accessories

Description	Part Number
<b>A</b> Replacement Element, 1st Stage	4P-090 (E6000) 4P-150 (E8000)
<b>B</b> Replacement Element, 2nd & 3rd Stage	DE6000
<b>C</b> Differential Pressure Indicator	N32-W1-DPI
<b>C</b> Blanking Cap (Cover for Indicator)	N32-95-020
<b>D</b> Bowl Assembly, 1st Stage (Bowl, Drain, O-ring)	N34-15-178
<b>E</b> Bowl Assembly, 2nd & 3rd Stage (Bowl, Drain, O-ring)	N34-15-180
<b>F</b> O-ring	N32-95-256
<b>G</b> Automatic Float Drain, 1st Stage	N32-95-979
<b>H</b> Manual Brass Drain, 2nd Stage & 3rd Stage	PC-03
<b>I</b> Replacement Regulator, ¾" (E6000)	NAR5000-N06
<b>J</b> Replacement Regulator, 1" (E8000)	R1000HD-G
<b>K</b> Replacement Gauge	KSG-008

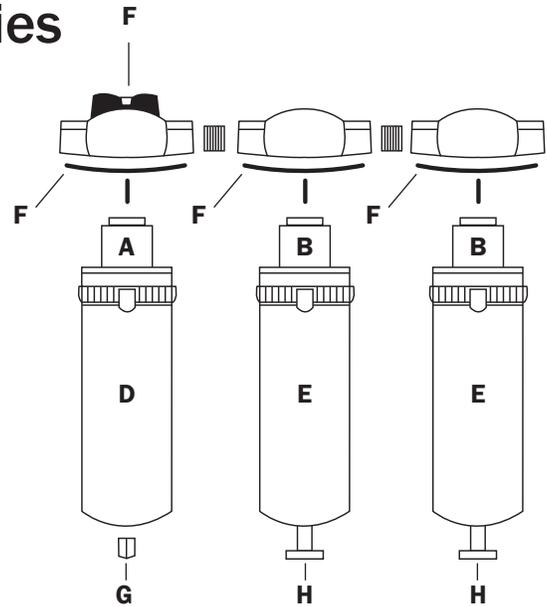

# Order Guide

Model Number	Port Size	Dimensions (in.)		
		Height	Width	Depth
E6000	¾"	18.0	30.0	5.0
E8000	1"	18.0	30.0	5.0

