

# Specifications

<b>Port Sizes</b>	1/4", 3/8", 1/2"
<b>Thread Styles</b>	NPT, BSPT, BSPP
<b>Flow Capacity</b>	60 SCFM @ 100 PSI
<b>Filter Capacity</b>	3.0 micron & larger
<b>Differential Pressure</b>	< 1.5 PSID at rated flow
<b>Max. Temp./Pressure (Aluminum Bowl)</b>	175 °F/200 PSIG
<b>Max. Temp./Pressure (Polycarbonate Bowl)</b>	125 °F/150 PSIG
<b>Approx. Weight (lb.)</b>	3.5
<b>ISO Class</b>	3 Particulate


For higher pressure applications, consult factory. Units equipped with differential pressure indicator have max. temperature and pressure of 125 °F and 150 PSIG, regardless of bowl material.



**Water**  
**Dirt**  
**Oil**  
**Oil Vapor**  
**Odor**

# Replacement Parts & Accessories

Description	Part Number
<b>A</b> Replacement Element	1P-060
<b>B</b> Differential Pressure Indicator	N32-W1-DPi
<b>B</b> Blanking Cap (Cover for units without indicator)	N32-95-020
<b>C</b> Bowl Assembly: Metal Bowl, Manual Petcock Drain, O-ring	N34-95-205
<b>C</b> Bowl Assembly: Metal Bowl, Automatic Float Drain, O-ring	N34-95-201
<b>D</b> Bowl Assembly: Poly Bowl, Manual Petcock Drain, O-ring*	N32-15-163
<b>D</b> Bowl Assembly: Poly Bowl, Automatic Float Drain, O-ring*	N32-15-165
<b>E</b> Manual Petcock Drain	PC-02/PC-03
<b>F</b> Automatic Float Drain (Metal Bowl)	N32-95-979
<b>F</b> Automatic Float Drain (Poly Bowl)	N32-95-973
<b>G</b> Bowl O-ring	N32-95-257
Mounting Bracket (Optional)	BK-1

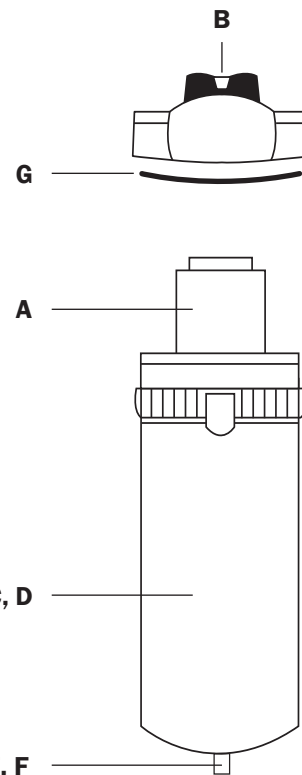

# Order Guide

Drain Type	Port Size	Model Number		Dimensions (in.)			
		Metal Bowl	Poly Bowl	Height**		Width	Depth
				Metal	Poly		
Manual	1/4"	1P-060-M02-P	1P-060-P02-P	10.0	10.0	3.9	3.9
	3/8"	1P-060-M03-P	1P-060-P03-P	10.0	10.0	3.9	3.9
	1/2"	1P-060-M04-P	1P-060-P04-P	10.0	10.0	3.9	3.9
Automatic	1/4"	1P-060-M02-F	1P-060-P02-F	10.0	10.5	3.9	3.9
	3/8"	1P-060-M03-F	1P-060-P03-F	10.0	10.5	3.9	3.9
	1/2"	1P-060-M04-F	1P-060-P04-F	10.0	10.5	3.9	3.9

\*Poly bowls come with metal bowl guard  
\*\*To add an indicator, add "i" to end of model number (Indicator adds about 1" to height)