Specifications

Flow Capacity 60/90/150 SCFM @ 100 PSI

Filter Capacity 0.01 micron & larger

Activated Carbon Oil Adsorption to 0.003 PPM < 5.0 PSID at rated flow

Differential Pressure Max. Temp./Pressure

(Aluminum Bowl) 175°F/200 PSIG Approx. Weight (lb.) 7.0/12.0/12.0 ISO Class 1 Particulate/Oil

For higher pressure applications, consult factory. Units equipped with differential pressure indicator have max. temperature and pressure of 125°F and 150 PSIG, regardless of bowl material.



Oil Vapor Odor

Water Dirt


Oil

*Units shown with indicator

Food Grade certified non-toxic powder coated filters meet requirements of 21 CFR 100. Coating ingredients meet at least one section of FDA Title 21, with the exception of food items containing 8% alcohol.

Replacement Parts & Accessories

	Description	Part Number
Α	Replacement Element, 1st Stage	3P-060/3P-090/3P-150
В	Replacement Element, 2nd Stage	3C-061/3C-091/3C-151
С	Differential Pressure Indicator	N32-W1-DPi-FG
C	Blanking Cap (Cover for Indicator)	N32-95-020-FG
D	Bowl Assy: Metal Bowl, Manual Petcock Drain, & O-ring (60)	N34-95-205-FG
D	Bowl Assy: Metal Bowl, Auto Float Drain, & O-ring (60)	N34-95-195-FG
D	Bowl Assy: Metal Bowl, Manual Petcock Drain, & O-ring (90/150)	N34-15-180-FG
D	Bowl Assy: Metal Bowl & Auto Float Drain (90/150)	N34-15-185-FG
E	Manual Petcock Drain	PC-03
F	Automatic Float Drain	N32-95-973-FG
G	Bowl O-ring (60)	N32-95-257
G	Bowl O-ring (90/150)	N32-95-256

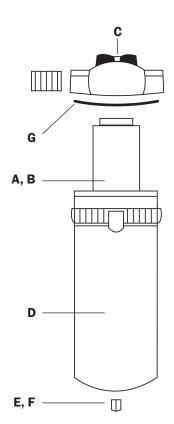

Order Guide

	Port Size	Model Number
Manual Drain	3/8"	3P-061-F03-DCP
	1/2"	3P-061-F04-DCP
	3/4"	3P-091-F06-DCP
	1"	3P-151-F08-DCP

	3/8"	3P-061-F03-DC
Automatic	1/2"	3P-061-F04-DC
Drain	3/4"	3P-091-F06-DC
	1"	3P-151-F08-DC

10.5	8.0	3.9
10.5	8.0	3.9
17.0	10.0	4.8
17.0	10.0	4.8

Dimensions (in.)

* Width

8.0

8.0

10.0

10.0

Depth

3.9

3.9

4.8

4.8

Height*

10.0

10.0

17.0

17.0

Literature Sheet: i009

^{*}To add an indicator, add "i" to end of model number (Indicator adds about 1" to height)