

Specifications

Port Sizes	3/8", 1/2", 3/4", 1"
Thread Styles	NPT, BSPT, BSPP
Flow Capacity	60/90/150 SCFM @ 100 PSI
Filter Capacity	0.01 micron & larger Activated Carbon Oil Adsorption to 0.003 PPM
Differential Pressure	< 5.0 PSID at rated flow
Max. Temp./Pressure (Aluminum Bowl)	175 °F/200 PSIG
Approx. Weight (lb.)	7.0/12.0/12.0
ISO Class	1 Particulate/Oil

For higher pressure applications, consult factory. Units equipped with differential pressure indicator have max. temperature and pressure of 125 °F and 150 PSIG, regardless of bowl material.




*Units shown with indicator

Water
Dirt
Oil
Oil Vapor
Odor

Food Grade certified non-toxic powder coated filters meet requirements of 21 CFR 100. Coating ingredients meet at least one section of FDA Title 21, with the exception of food items containing 8% alcohol.

Replacement Parts & Accessories

Description	Part Number
A Replacement Element, 1st Stage	4P-060/4P-090/4P-150
B Replacement Element, 2nd Stage	3C-061/3C-091/3C-151
C Differential Pressure Indicator	N32-W1-DPI-FG
C Blanking Cap (Cover for Indicator)	N32-95-020-FG
D Bowl Assy: Metal Bowl, Manual Petcock Drain, & O-ring (60)	N34-95-205-FG
D Bowl Assy: Metal Bowl, Auto Float Drain, & O-ring (60)	N34-95-195-FG
D Bowl Assy: Metal Bowl, Manual Petcock Drain, & O-ring (90/150)	N34-15-180-FG
D Bowl Assy: Metal Bowl, Auto Float Drain, & O-ring (90/150)	N34-15-185-FG
E Manual Petcock Drain	PC-03
F Automatic Float Drain	N32-95-973-FG
G Bowl O-ring (60)	N32-95-257
G Bowl O-ring (90/150)	N32-95-256

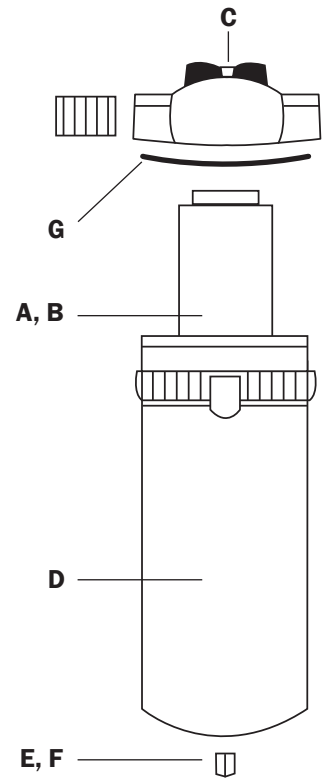

Order Guide

	Port Size	Model Number	Dimensions (in.)		
			Height*	Width	Depth
Manual Drain	3/8"	4P-061-F03-DCP	10.0	8.0	3.9
	1/2"	4P-061-F04-DCP	10.0	8.0	3.9
	3/4"	4P-091-F06-DCP	17.0	10.0	4.8
	1"	4P-151-F08-DCP	17.0	10.0	4.8
Automatic Drain	3/8"	4P-061-F03-DC	10.5	8.0	3.9
	1/2"	4P-061-F04-DC	10.5	8.0	3.9
	3/4"	4P-091-F06-DC	17.0	10.0	4.8
	1"	4P-151-F08-DC	17.0	10.0	4.8

*To add an indicator, add "i" to end of model number (Indicator adds about 1" to height)

Literature Sheet: i009

